

EXmar

US-FL/01

the electro-hydraulic pre-assembly machine



Flexibel in use

- Practical tabletop unit
- Ready for operation quickly
- For cutting and clamping ring fittings

Convincing in use

- Safe and fast assembly
- Constant quality
- High economic efficiency

EXMAR

US-FL/01

The US-FL/01 pre-assembly device can be used for cutting ring fittings from 6 to 42 mm and for NC clamping ring fittings from 6 to 25 mm diameter. With an additional tool, the device can also be used for flaring tubes with a diameter of 6 to 42 mm and a maximum wall thickness of 4 mm.

Before assembly, the respective pressure is set manually. One mounting plate and one pressing tool are available for each diameter. They are all labeled to prevent mix-ups. For the organisation at the workplace, tool holders are additionally available.



Product range

Designation	Mat.-Nr.
US-FL/01 voltage 230 V / 50 Hz 1 PH	888.1000.000.13
US-FL/01 voltage 400 V / 50 Hz 3 PH	888.1000.000.14

Please contact us for the appropriate mounting plate and pressing tools.

Services


- Demonstration at your premises
- Possibility of borrowing for projects
- Rental period 1 to 3 months

Scope of delivery

- Basic unit with power cable (without plug) and operating manual
- Required mounting plate and pressing tool

Specifications

- Dimensions: L 45 x W 63 x H 27 cm
- Voltage: 230 V oder 400 V
- Motor power: 0.75 kW
- Weight: approx. 58 kg

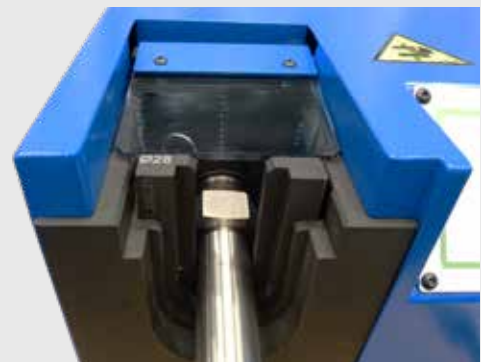

EXMAR GmbH

Am Taubenbaum 6, D-61231 Bad Nauheim, Tel. +49 (0)6032 / 86986-0, Fax +49 (0)6032 / 86986-13, info@exmar.de
www.exmar.de